





PD-4225S

MODEL	SCREEN SIZE	HEIGHT	WIDTH	DEPTH	WEIGHT	POWER REQUIREMENT	FINISH
PD-4225S (w/ speakers & base)	42" diagonal, viewable	27-5/8"	49-5/8"	10-7/8"	81.7 lbs	AC100-240V ~ 50/60Hz	Hi-Tech Silver
PD-4225S (w/o speakers & base)	42" diagonal, viewable	26"	40-3/4"	4-3/8"	65.2 lbs	AC100-240V ~ 50/60Hz	Hi-Tech Silver

FRONT PANEL: PD-4225S

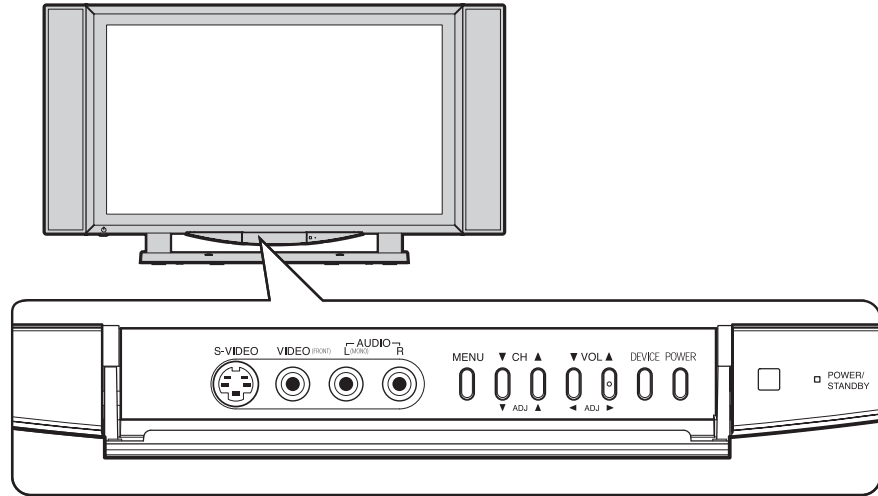

BACK PANEL: PD-4225S

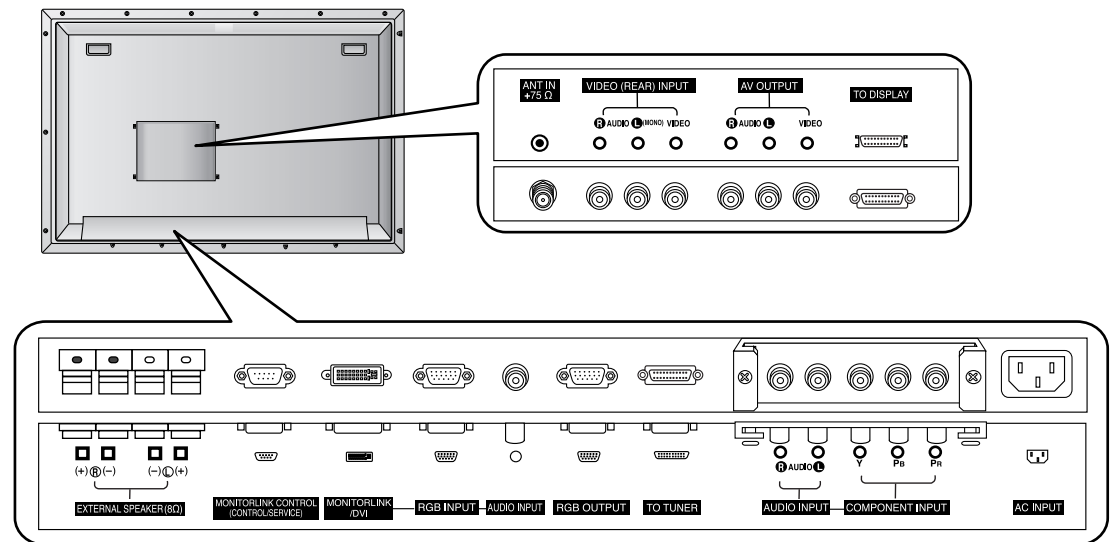

• Descriptions and specifications are subject to change without notice. Please visit [www.mitsubishi-tv.com](http://www.mitsubishi-tv.com) for information regarding product changes. Dimensions shown are approximate, not exact, and are not intended for custom installation purposes. Custom installers should take and use exact measurements from the unit to be installed. Custom installations should also allow for air circulation and ventilation. Cosmetic appearances of products may vary from that depicted here.

DISPLAY	PD-4225S
Screen Size	42" diagonal, viewable
Aspect Ratio	Widescreen 16:9
Pixel Array	852 Horizontal x 480 Vertical
Pixel Pitch	1.08mm x 1.08mm (square pixels)
Contrast Ratio	1000:1
Peak Brightness	1000cd/m2
Horizontal Scan Range	15.5kHz - 68.7kHz
Vertical Scan Range	56Hz - 120Hz
SCAN RATE COMPATIBILITY	
Analog Video	NTSC
Digital TV	480i, 480p, 720p, 1080i (ATSC, USA)
PC Monitor	VGA, SVGA, XGA, SXGA, (4:3 formats) W-XGA (16:9 format)
VIDEO PERFORMANCE	
Comb Filter	Motion-Adaptive 3D Y/C
Film Mode	3:2 pulldown compensation
Color Temperature	High, Medium, Low and user programmable settings
Format Modes	Standard, Narrow, Stretch, Expand
Zoom Mode	Yes
Multi-Image Modes	PIP
USER INTERFACE	
AV Picture	Brightness, Contrast, Color, Tint, Sharpness, Color Temperature
Digital Noise Reduction	Yes (switchable)
Monitor Adjustments	V-Position, H-Position, V-Height, H-Width
Menu Languages	English, French, Spanish
INPUTS	
Analog Video	2 composite, 1 S-video, plus stereo audio
Digital TV	1 (component video, plus stereo audio)
PC Monitor	1 (mini D-Sub15, with stereo audio)
MonitorLink™	1 (proprietary Mitsubishi digital interface)
OUTPUTS	
Audio	2 x 5 Watts, 50Hz - 20kHz, 1% THD into 8 Ohms
PC Monitor	1 (mini D-Sub15)

48 REMOTE CONTROL	PD-4225S
Dedicated, IR	Yes